





Specifications

Voltage: 12-240V DC / 24-240V AC Relay Output: NO/NC (2A)


Range: 11M Max (-40% Adverse Conditions)


IP Rating: 66

Operating Temperature: -12°C to 55°C


Assembly Example

Dimensions




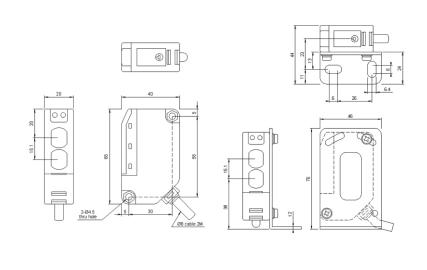


Installation Height




Wiring and LED's

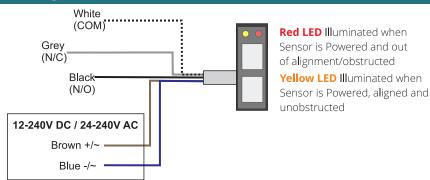


Swing Gate Placement




Sliding Gate Placement

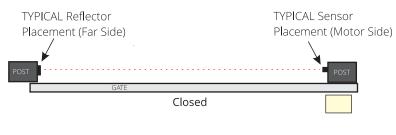

Premier SW24 Swing Gate Control Board Connection

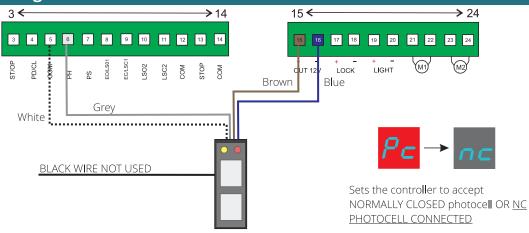

Titan 2410 Premier SL24 Sliding Gate Control Board Connection

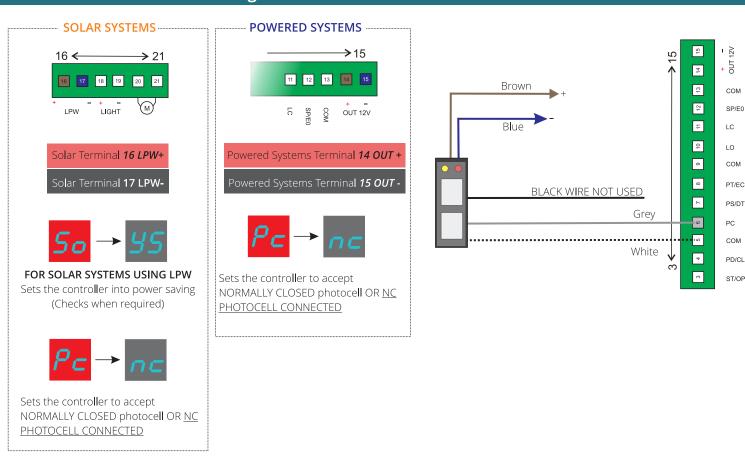

Titan 1000 Premier SL240AC Sliding Gate Control Board Connection

